


PMM 3024

Permeameter

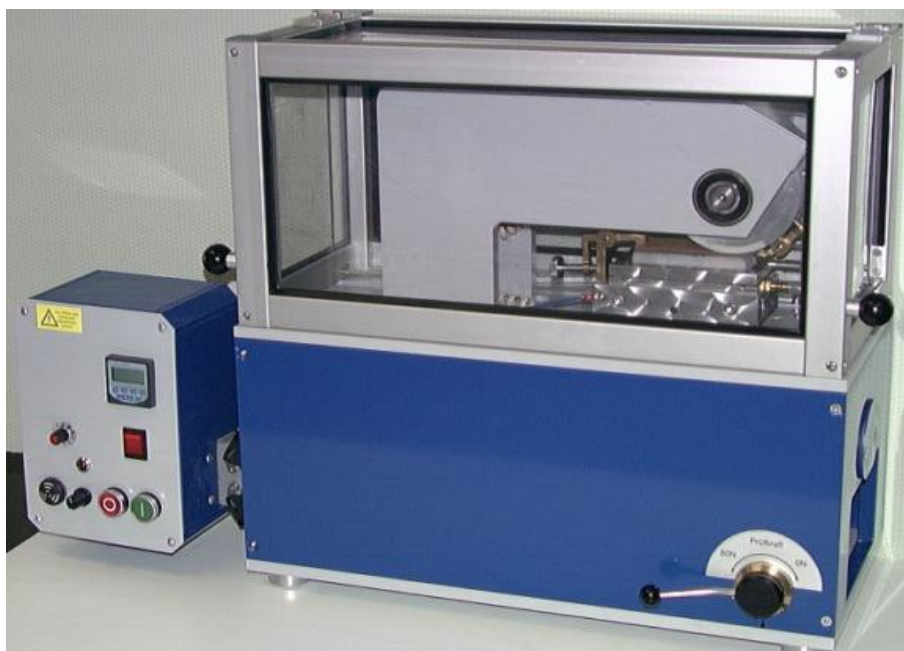

Permeameter

The permeameter assesses the impermeability of leather outsoles, midsoles and insoles according to DIN EN ISO 5404, EN ISO 20344.

One side of the sample sole is constantly in contact with water and at the same time flexed and compressed (simulating the gait movement). This way, various time-related aspects of impermeability can be assessed. (replaces DIN 53338).

Technical Data

Footprint: 800 × 300 × 500 mm

Supply voltage: 230 V

Supply frequency: 50 Hz

Reference N° **PMM 3024**

Phone: +49 6331 2490 0, E-Mail: peter.schultheis@pfi-germany.com